

PORCELAIN TILES

600x1200mm

About us

We Ceramex Ceramic is a large family owned business operating in the Manufacturing of Porcelain, Ceramic Floor & Ceramic Wall Tiles.



We go with constant work, discipline and always the interest of offering the best products, at the best Market prices, we have grown together.

Our buying power and cost efficiencies mean you get better value for your money. Ceramex Ceramic its aims to inspire transform and entrance your dream space by bringing leading designer collection.

With the new innovations, technology and constant training to our sales force, we prepared to meet your needs. Choose from a wide range of tiles, various products, as well as sizes, great floor and wall alternatives. In addition you will find a variety of kitchens, bathrooms, living rooms, outdoors & sanitary wares.

"The professional knowledge and good service you get on the purchase"
-Ceramex Ceramic





COLLECTION

600×1200mm

















































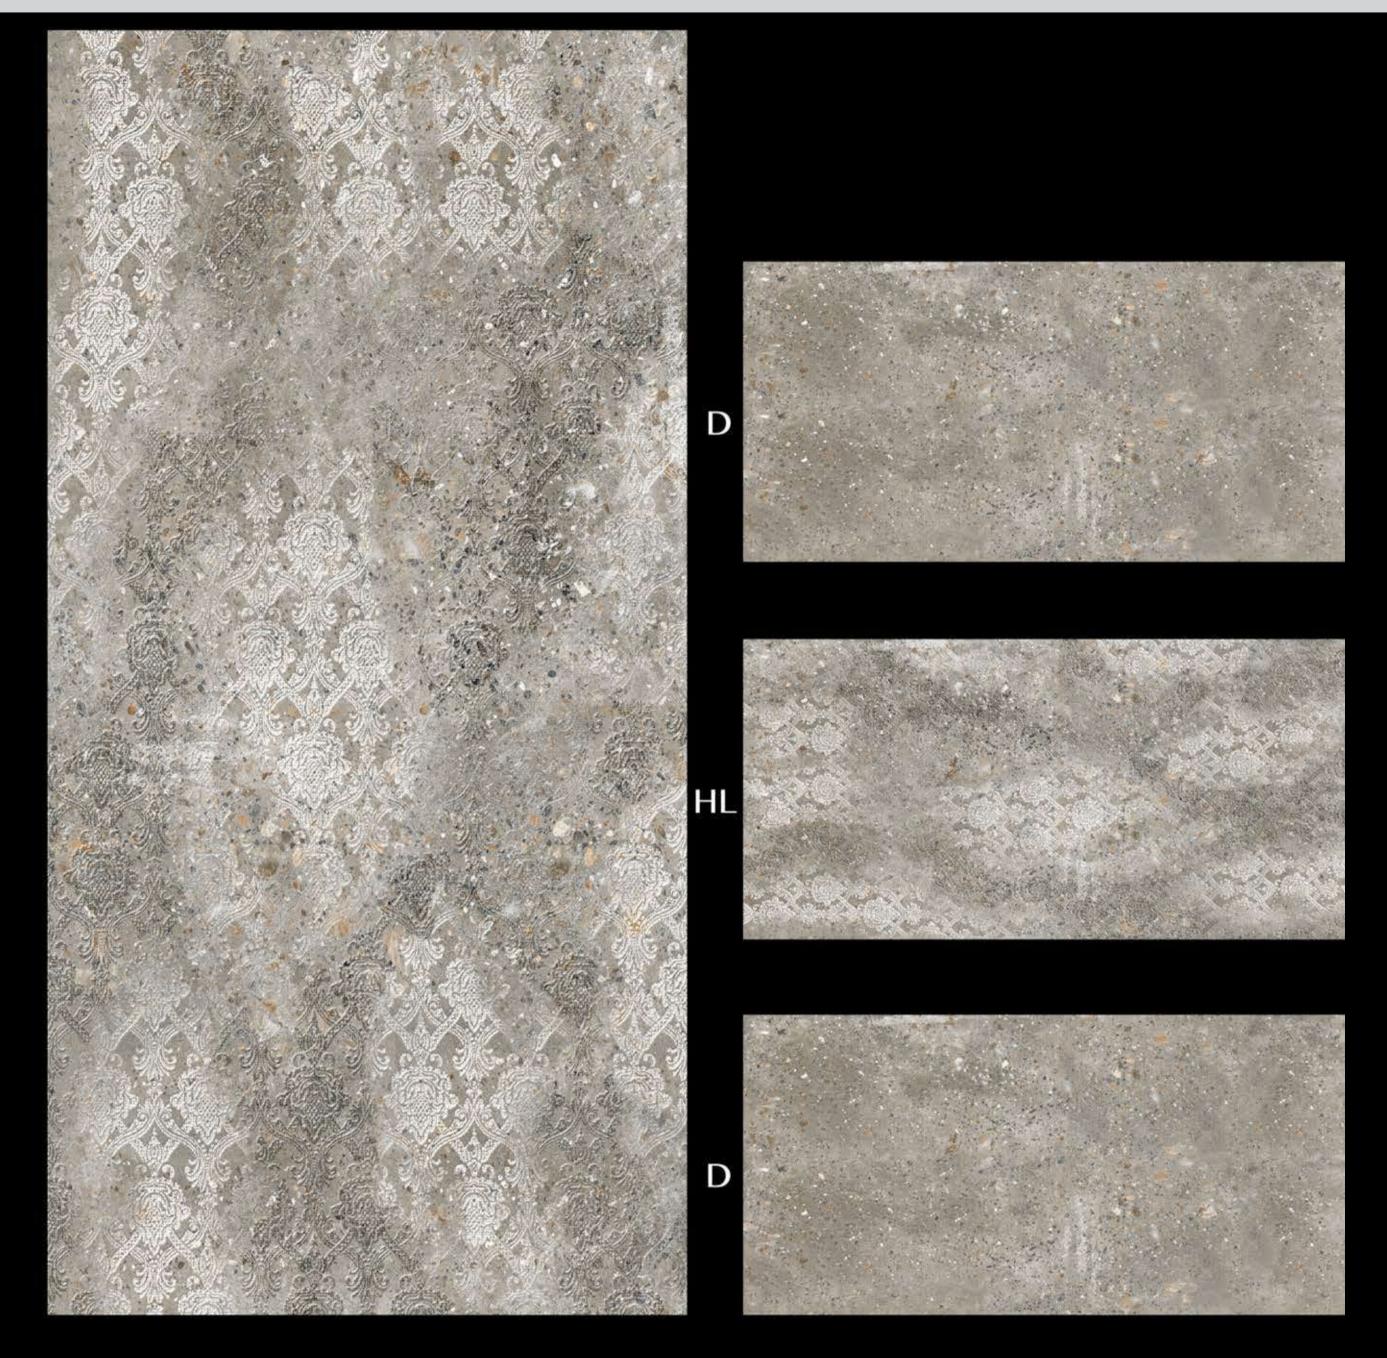








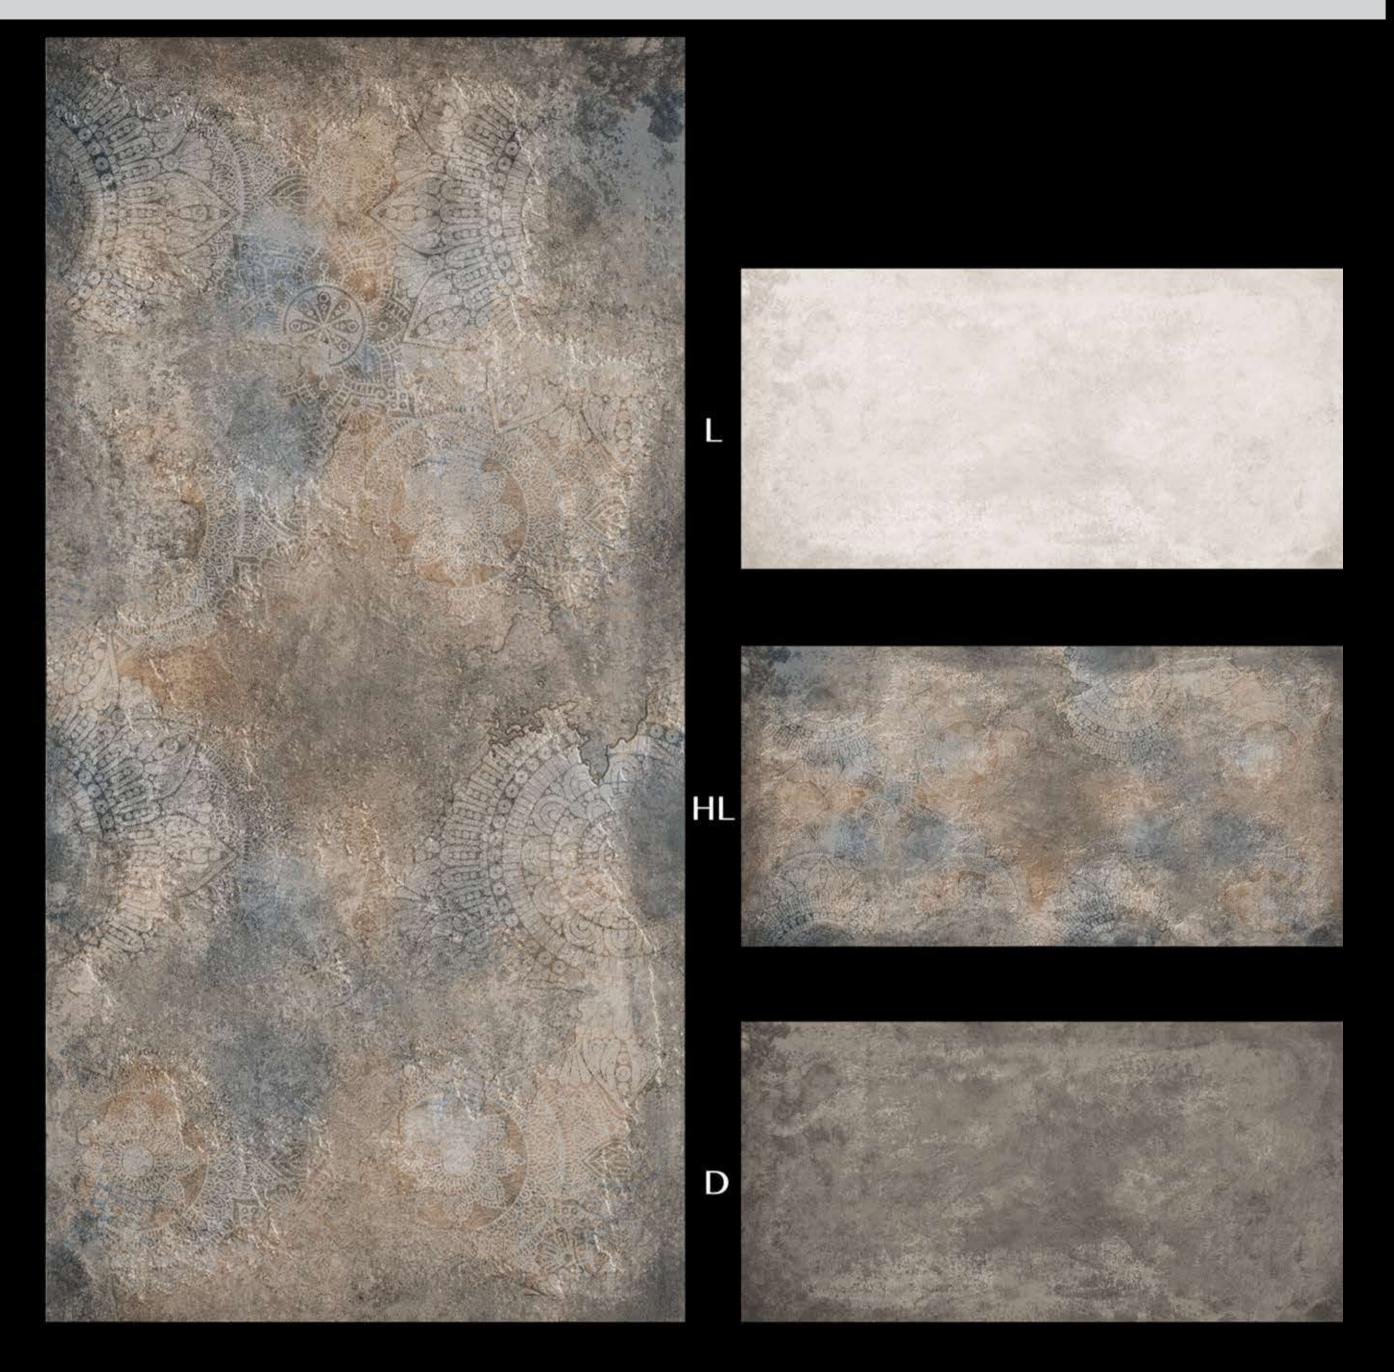








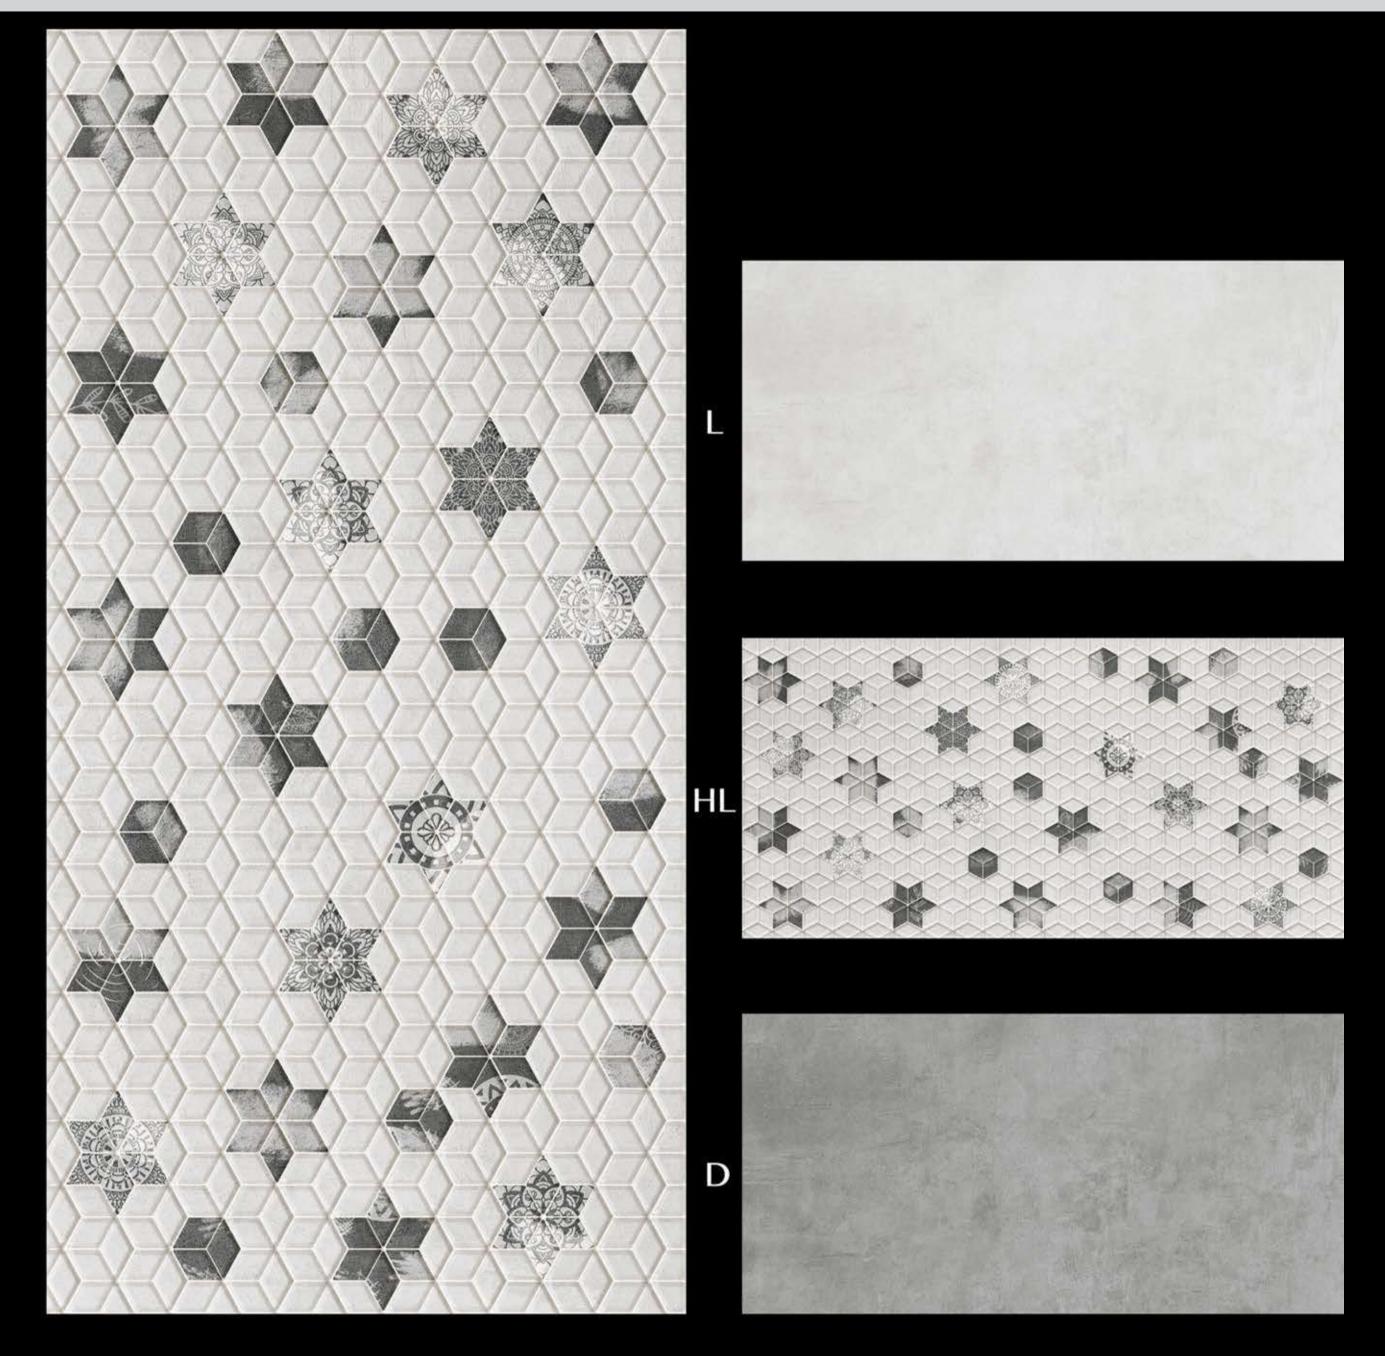








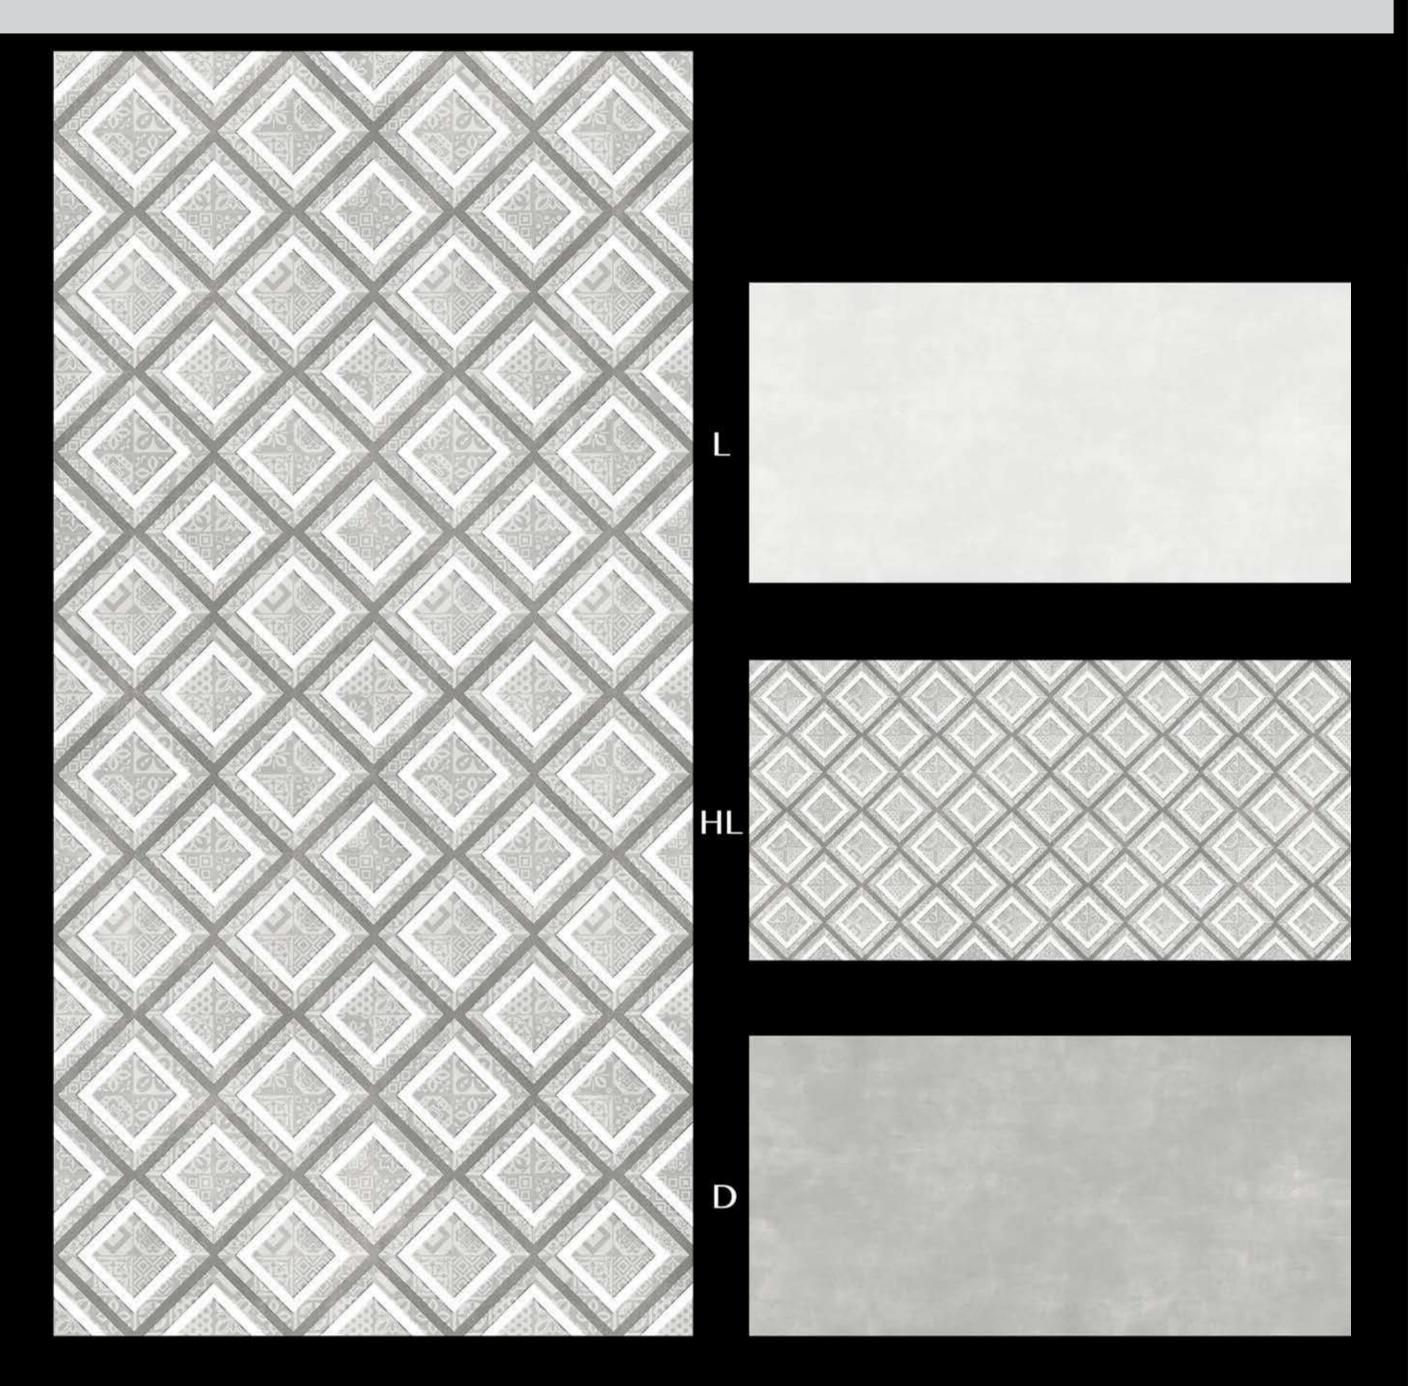







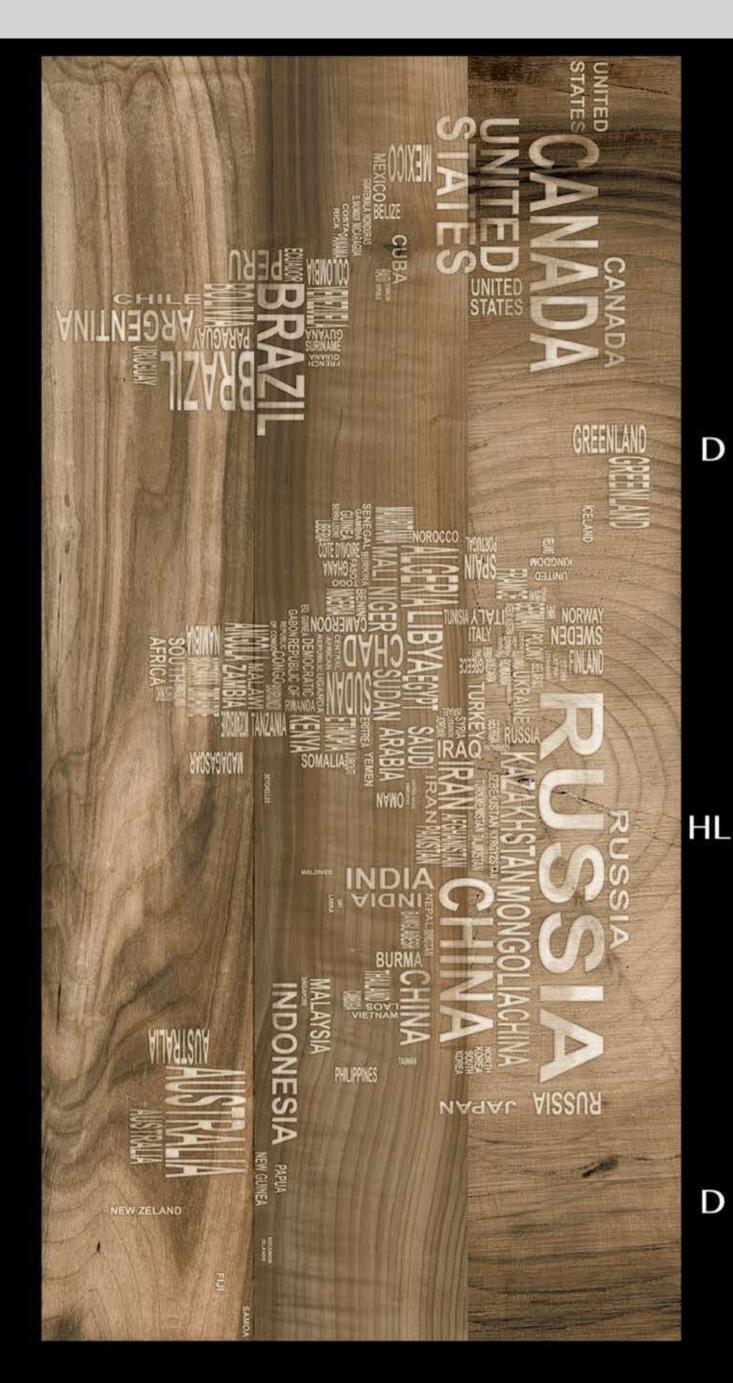














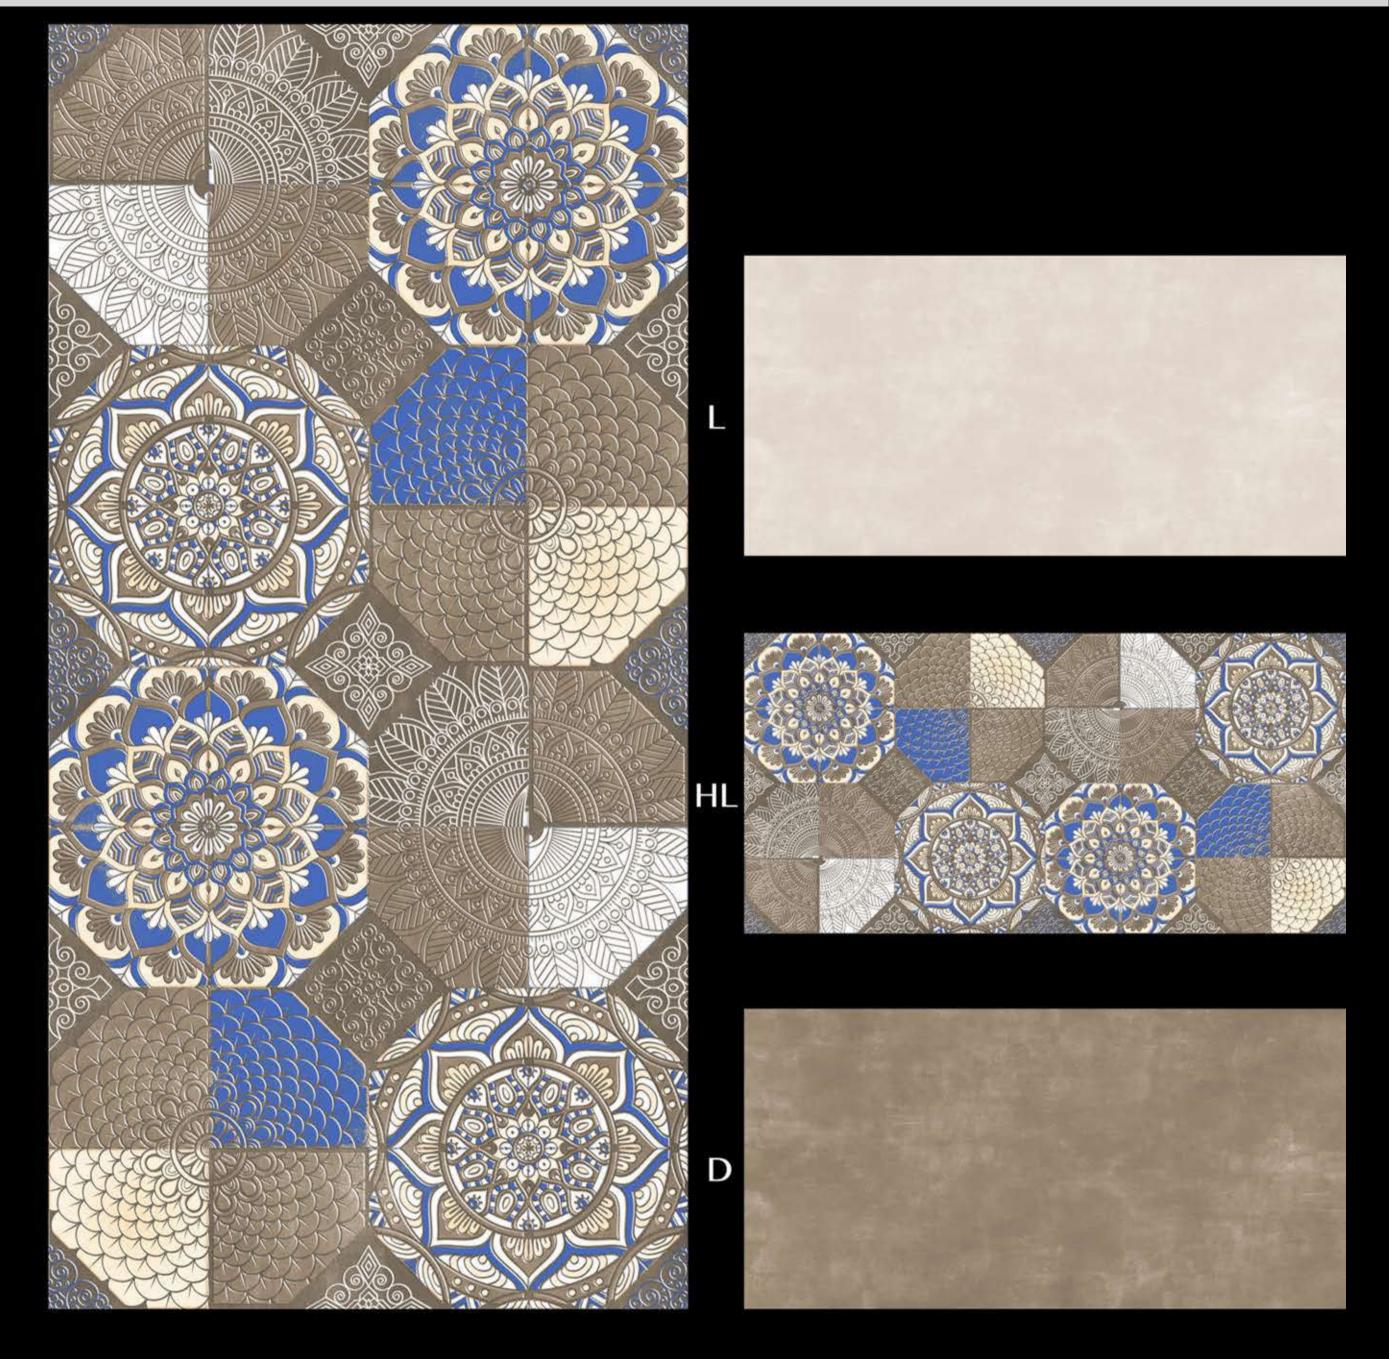

























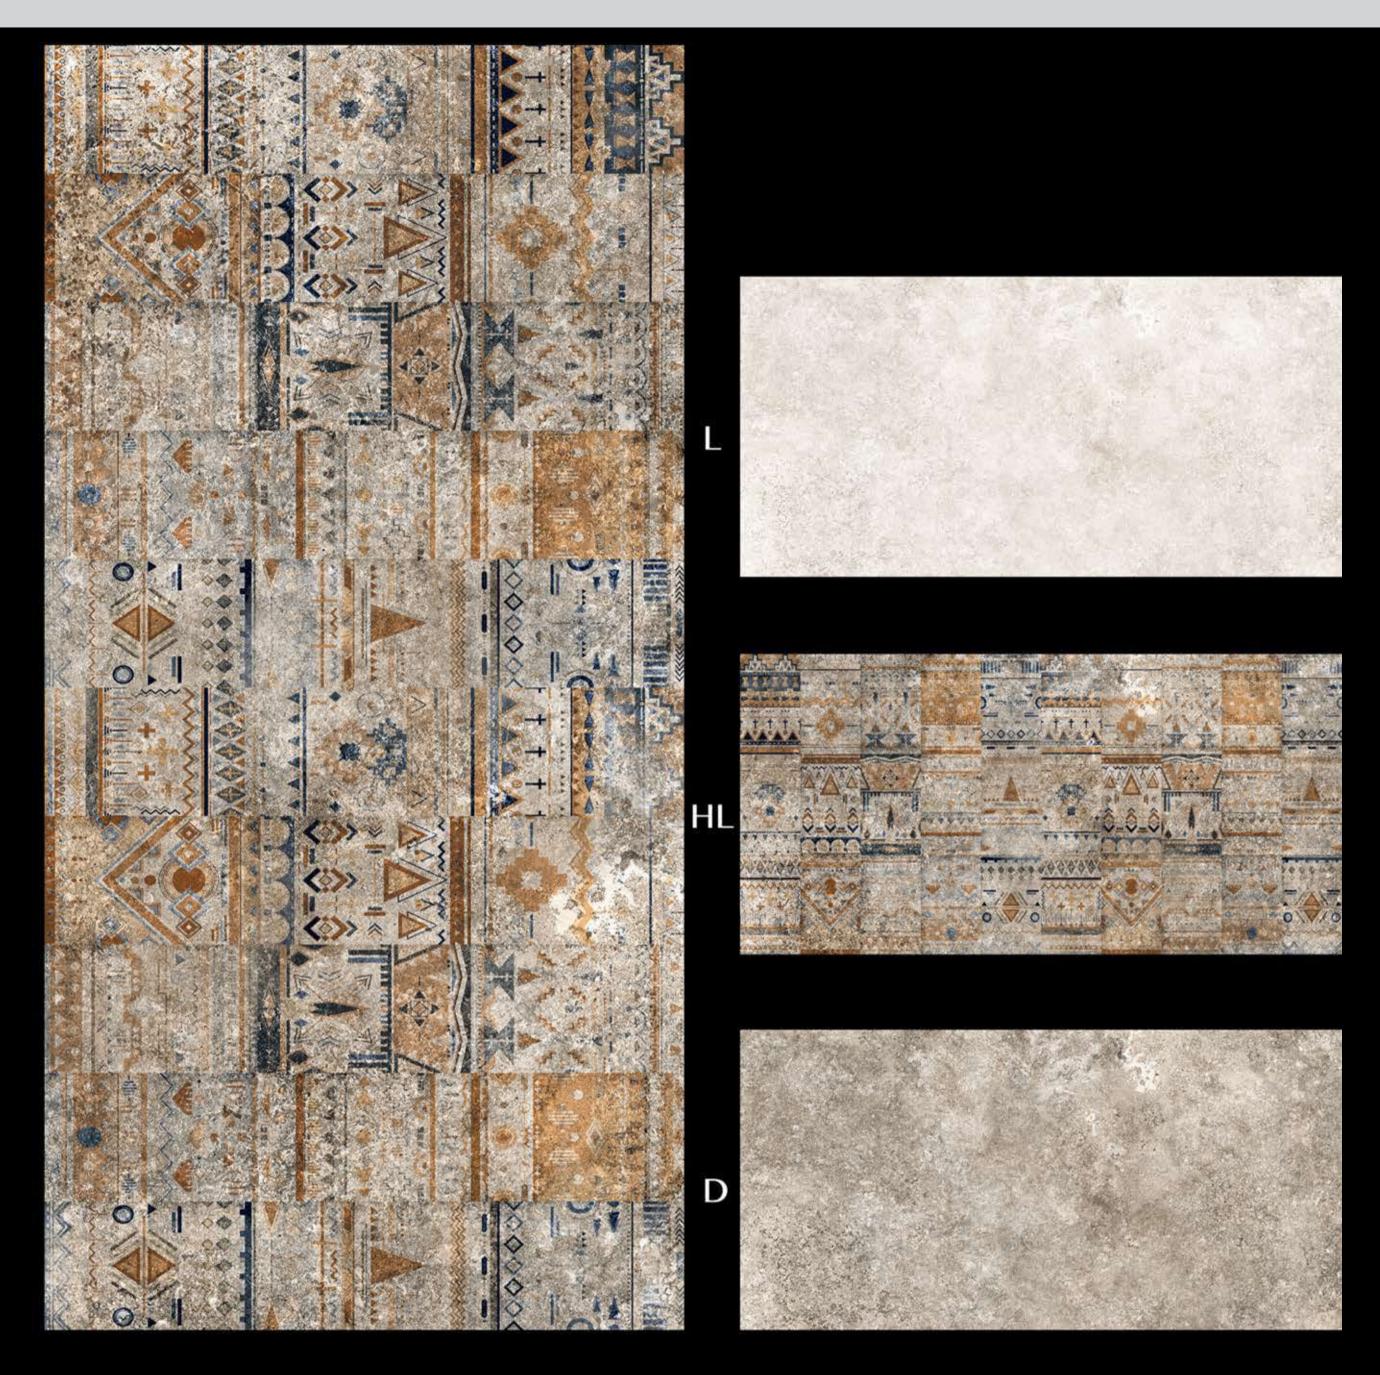







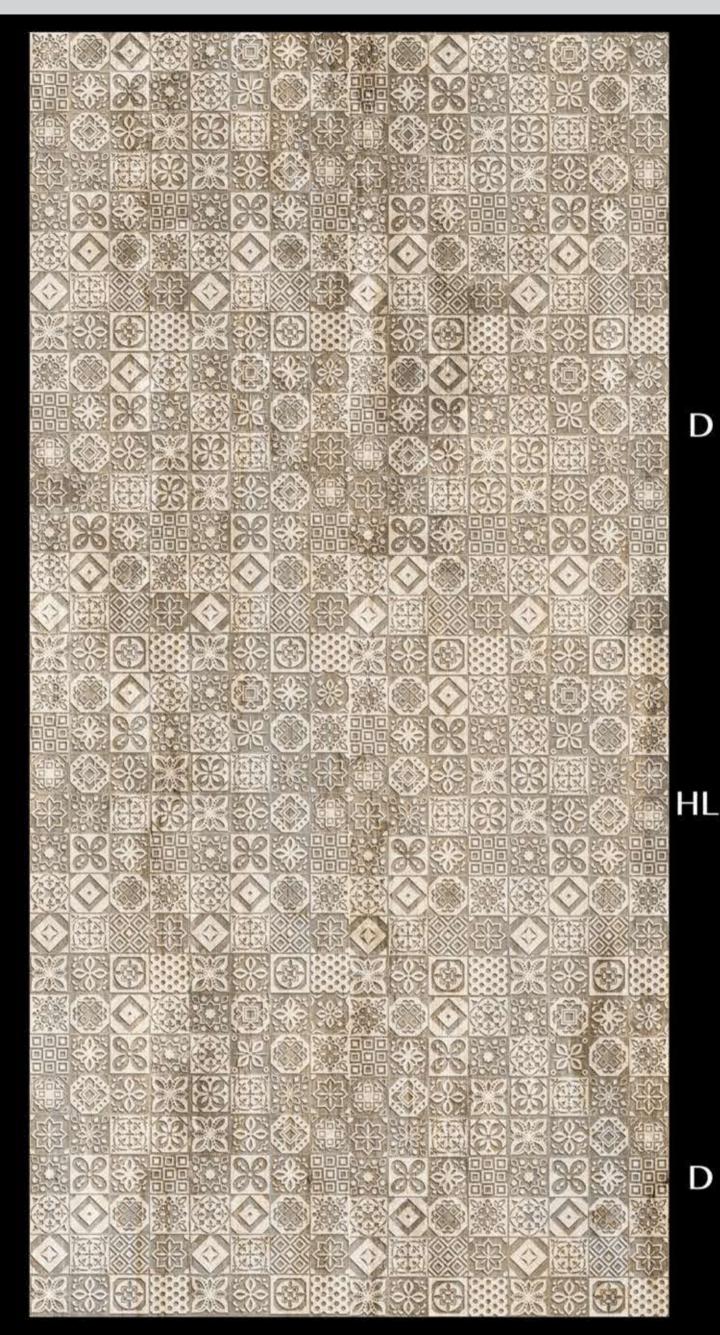























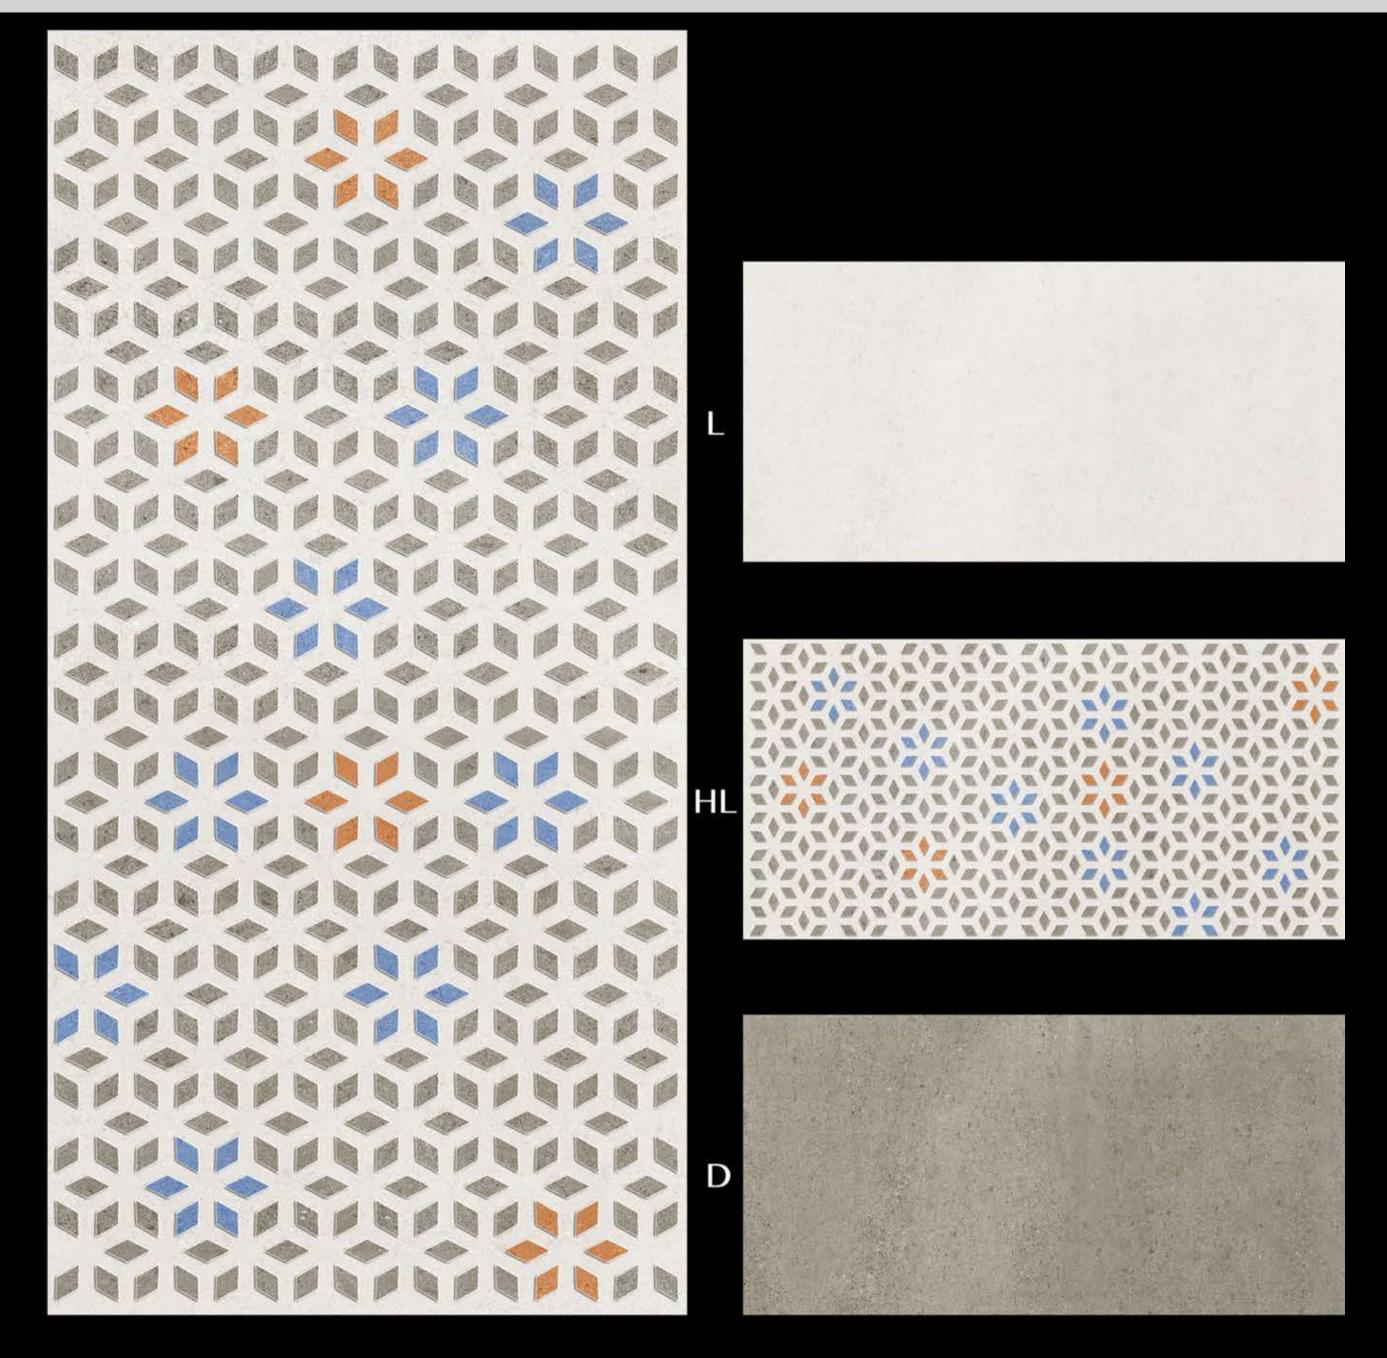







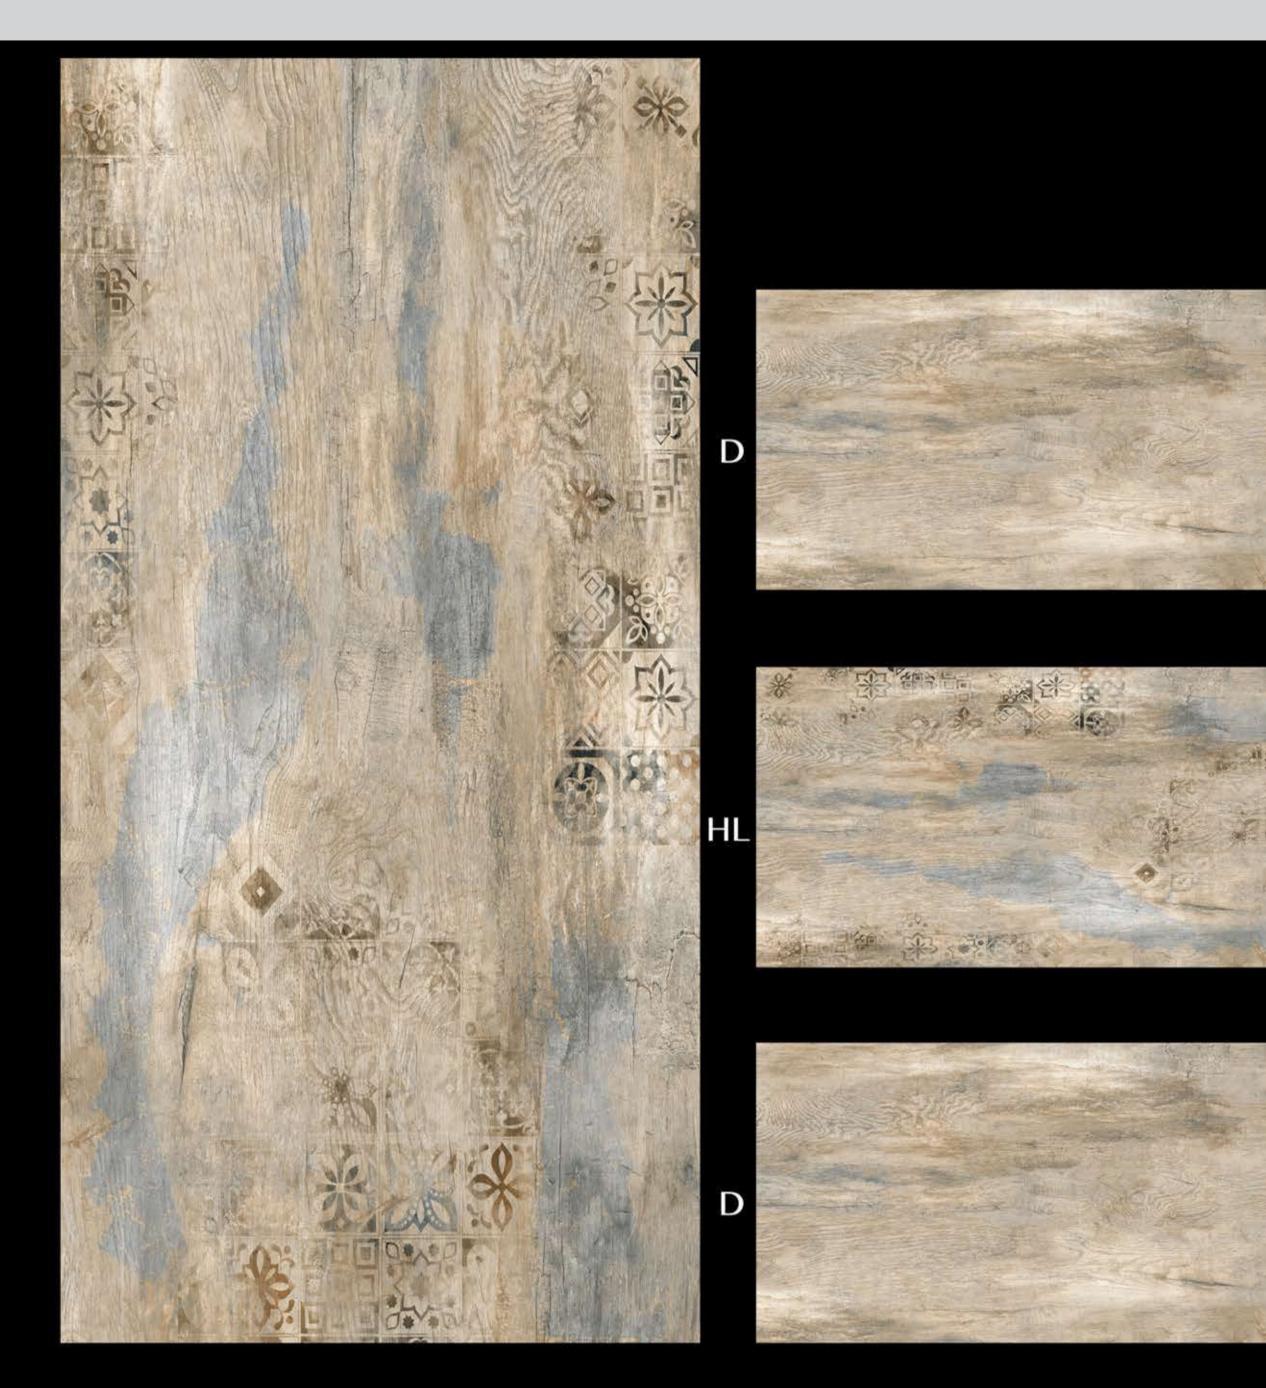

















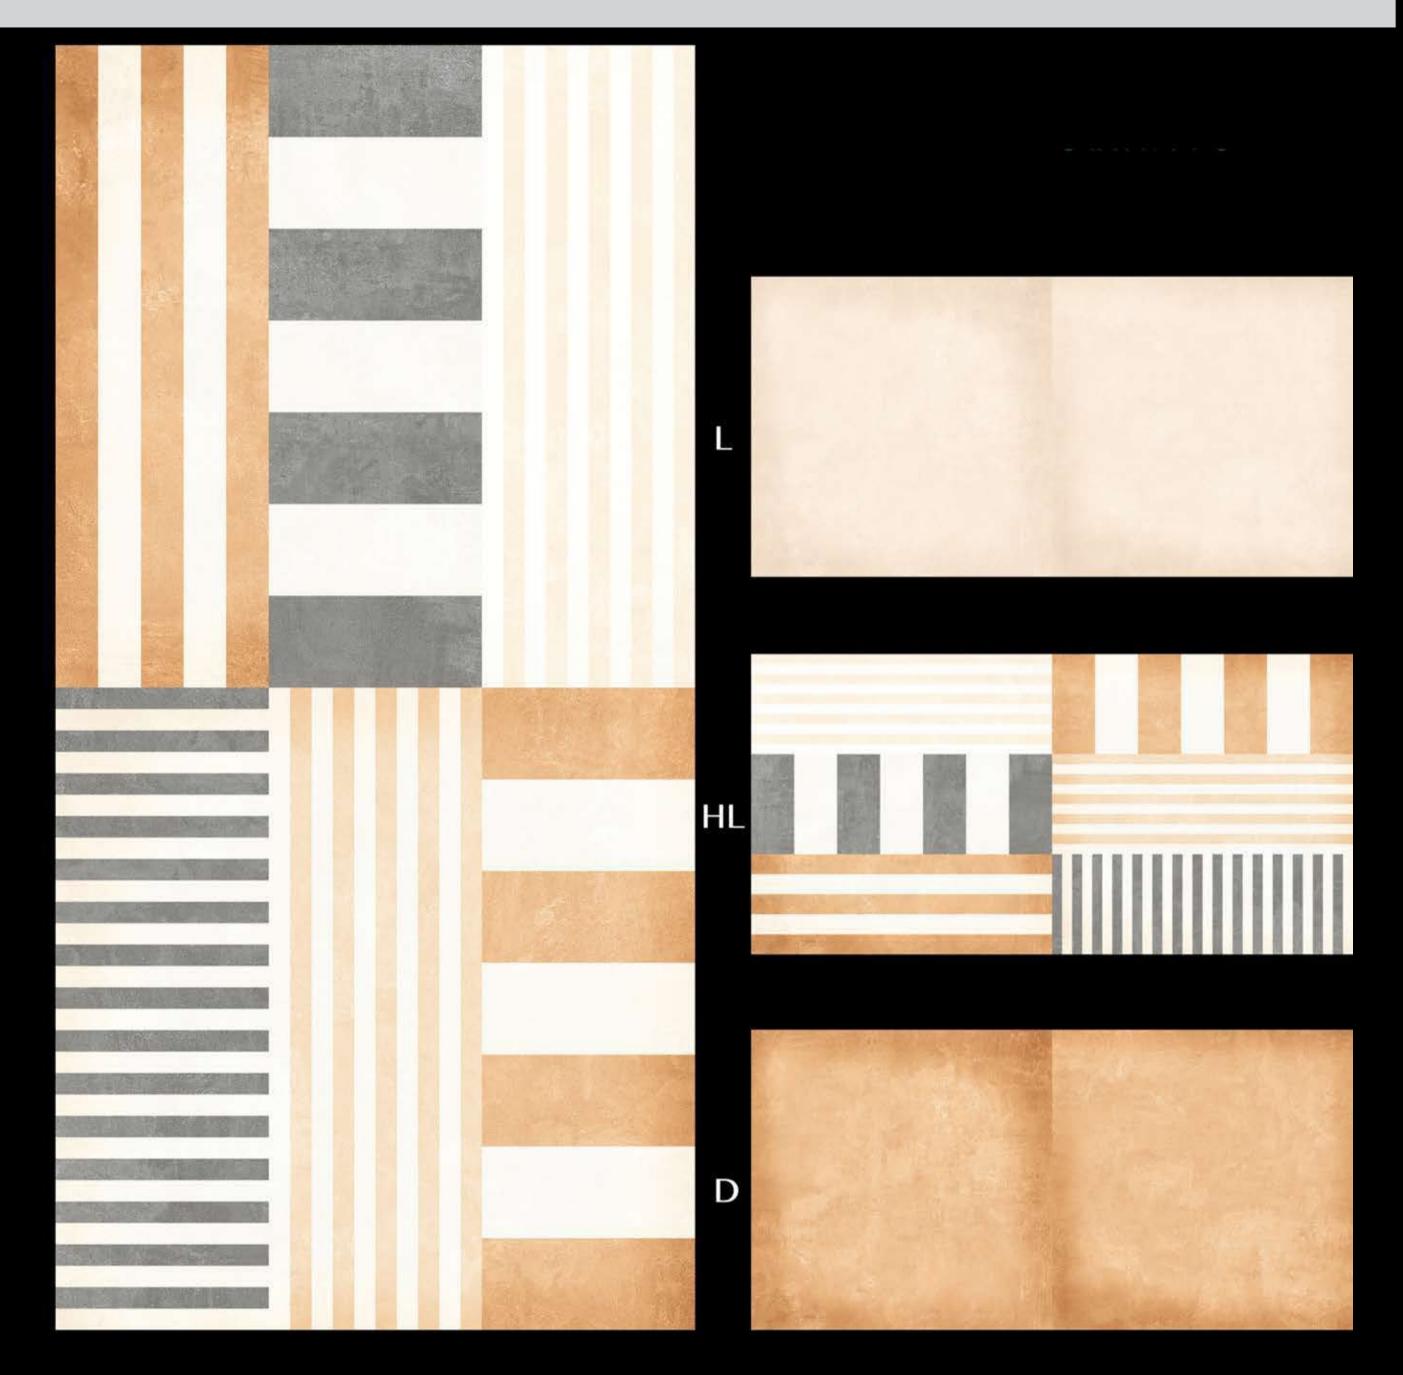








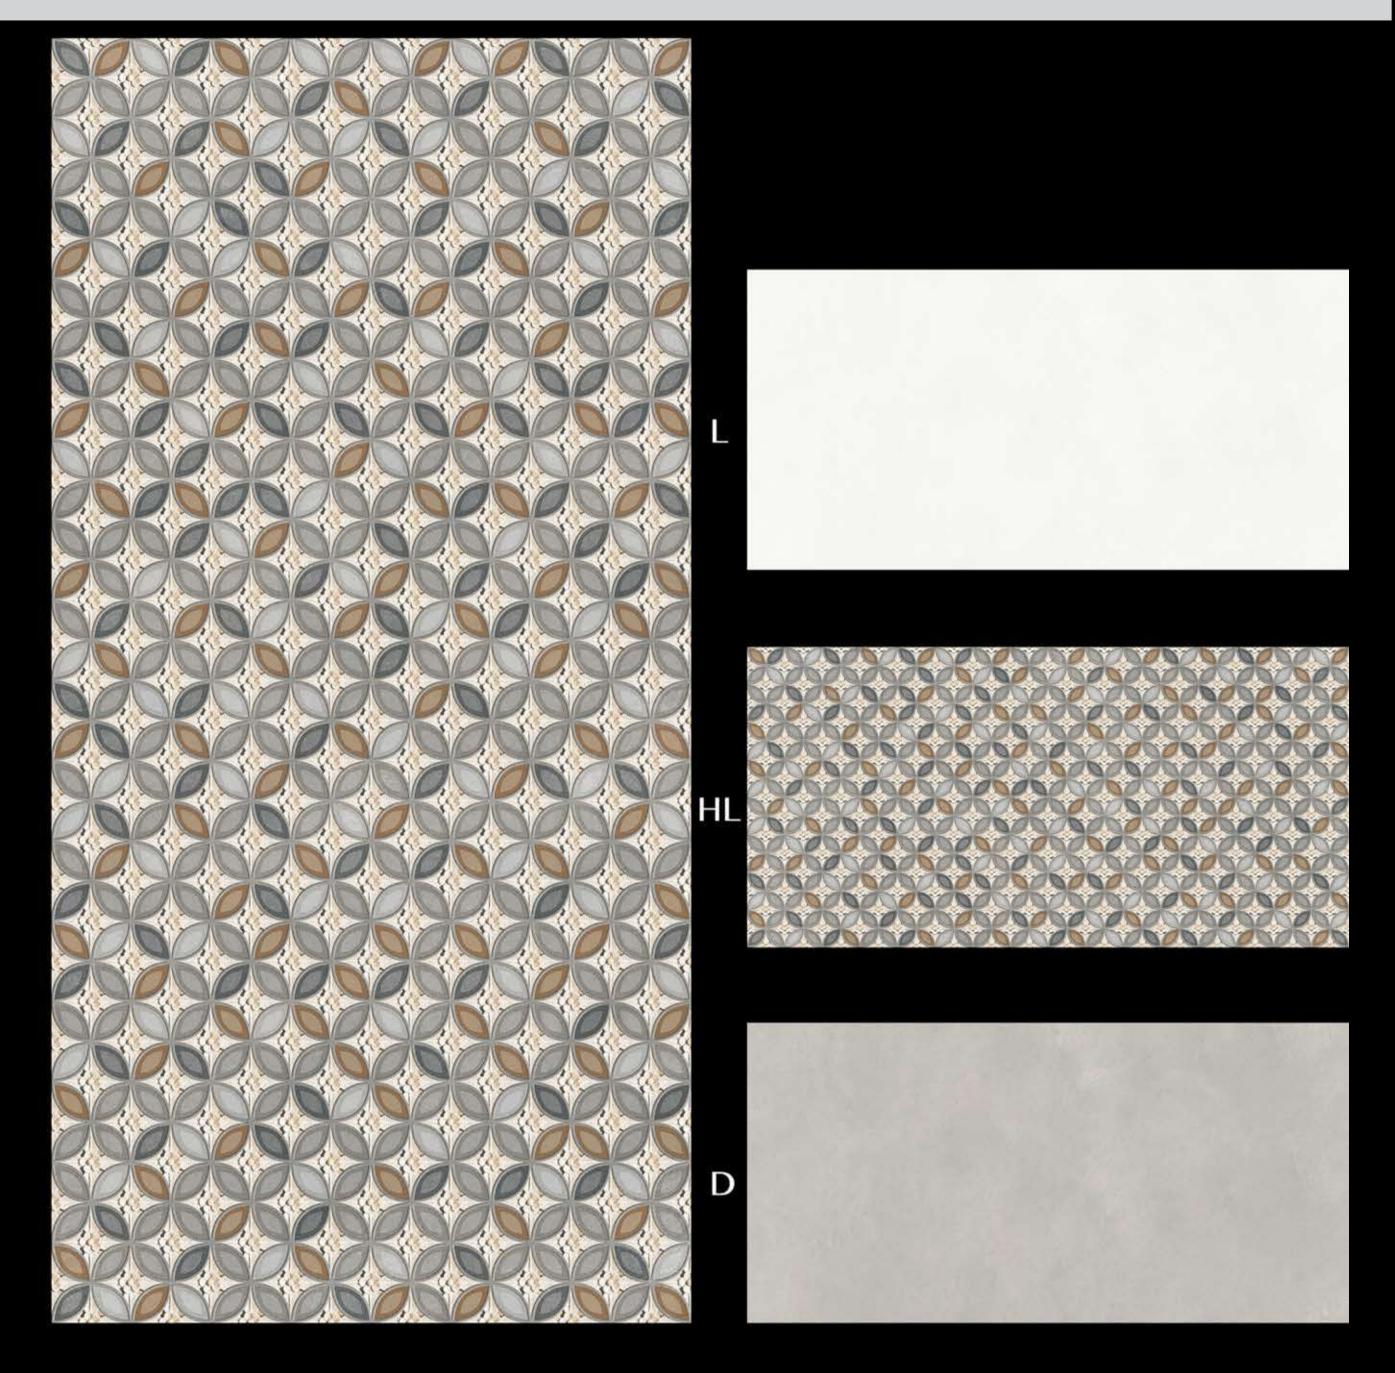







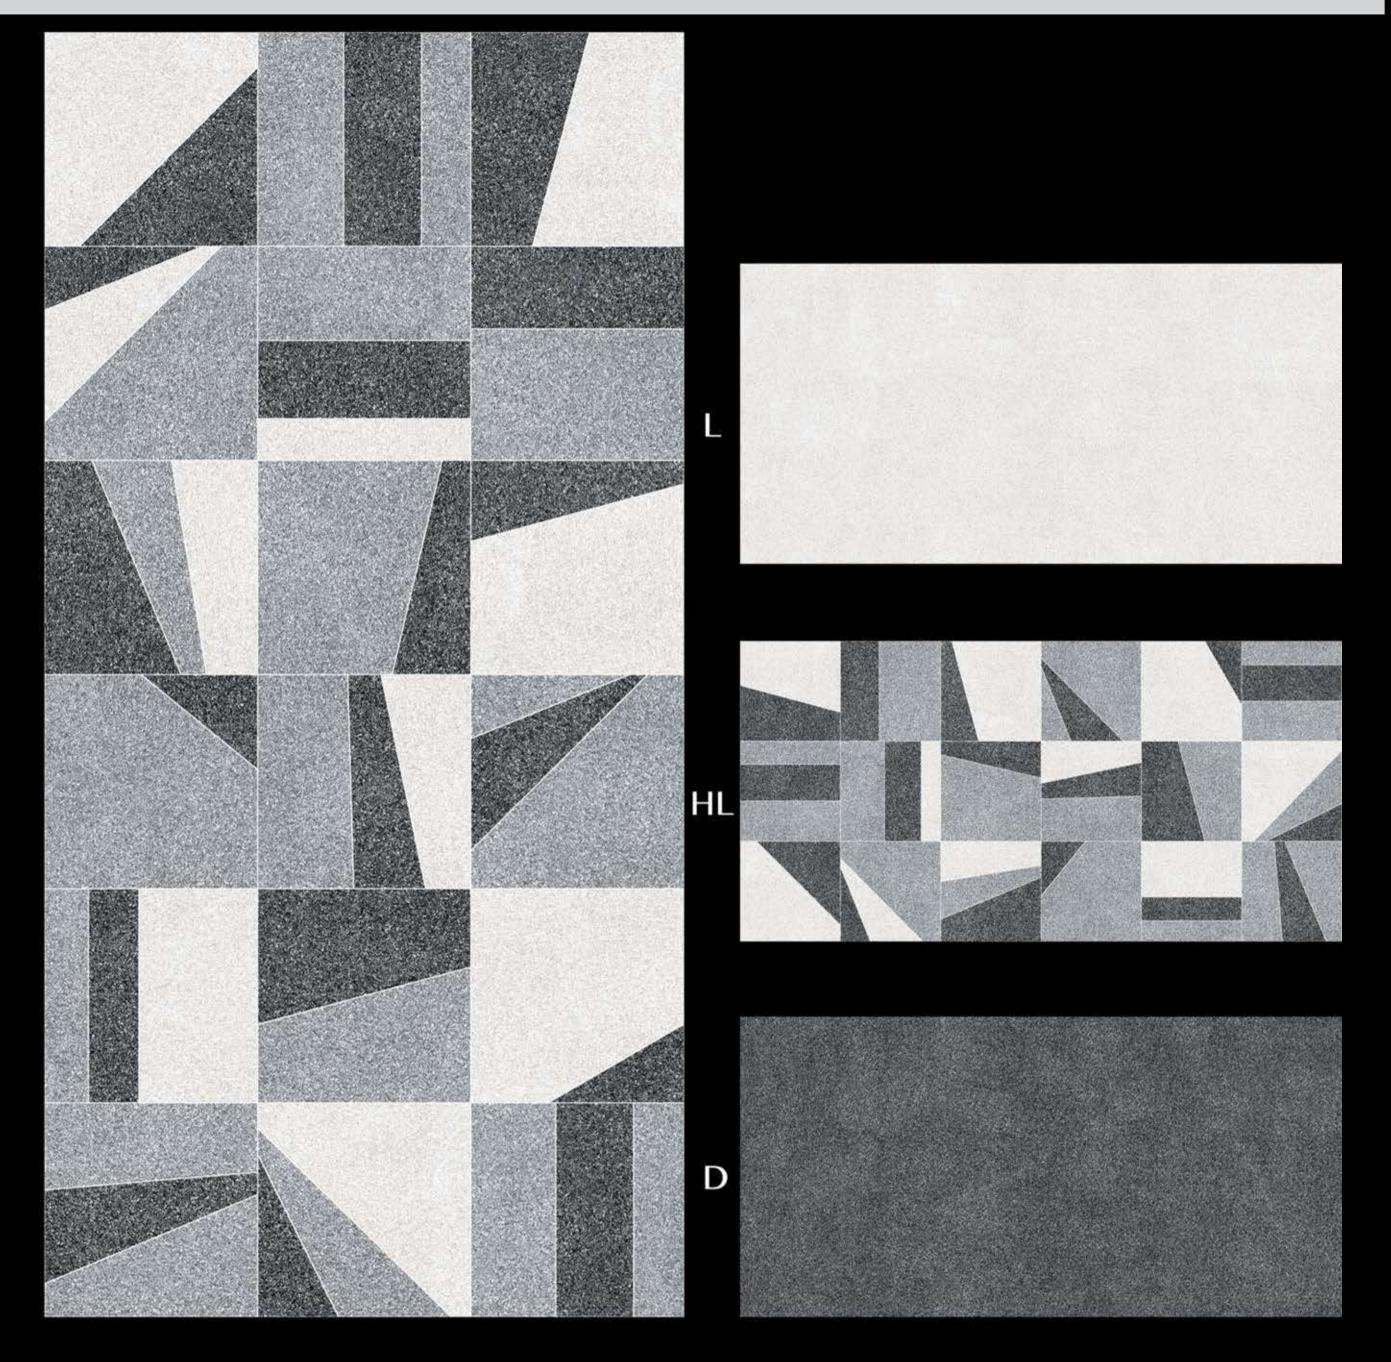











TECHNICAL SPECIFICATION

	TEST DESCRIPTION	TEST METHOD	ISO STANDARD 13006 B1a TILES	OUR VALUE
1	Leanth and Width	BS EN ISO 10545-2	± 0.6%	± 0.3%
2	Thickness	BS EN ISO 10545-2	± 5.0%	± 3.0%
3	Straightness of sides	BS EN ISO 10545-2	± 0.5%	± 0.3%
4	Rectangularity	BS EN ISO 10545-2	± 0.6%	± 0.3%
5	Surface Flatness	BS EN ISO 10545-2	± 0.5%	± 0.3%
6	Water absorption	BS EN ISO 10545-3	≤ 0.5%	≤ 0.05%
7	Bracking strenght	BS EN ISO 10545-4	≥ 1300N	≥ 1500N
8	Modulus of rupture	BS EN ISO 10545-4	≥ 35 N/mm²	≥ 45 N/mm²
9	Resistance to deep abrasion	BS EN ISO 10545-6	≤ 175mm³	≤ 150mm³
10	Linear thermal expansion	BS EN ISO 10545-8	≤ 9 x 10 °C	≤ 7 x 10 °C
11	Thermal shock resistance	BS EN ISO 10545-9	No visible defect	No visible defect
12	Frost resistance	BS EN ISO 10545-12	Frost proof	Frost proof
13	Resistance to chemicals	BS EN ISO 10545-13	No visible effete	No visible effete
14	Resistance to stains	BS EN ISO 10545-14	Manufacturer to state class	Stains removed Min. Class 2
15	Colour resistance	BS EN ISO 10545-16	no damage	no damage
16	colour resistance to uv Light	DIN 51094	No change in colour	No change in colour
17	Scratch hardness (MOH's Scale)	EN 101	≥ 6 MOHS	≥ 7 MOHS
18	Surface quality	BS EN ISO 10545-2	Min. 95%	No visible defect
19	Skid resistance(friction co-efficient)	BS EN ISO 10545-2	> 0.4	> 0.4
20	Moisture expansion	-	Nil	Nil

Note: *Colour shown in this catalogue may very with the original tiles. *Slight shade & size variation is an Inherent property of ceramic / vitrified tiles.

Packing Details					
SIZE IN MM	NO. OF TILES	COVERAGE AREA			
600x1200mm	2 Pcs. per Box	1.44 sq mtr. (Approx)			










































+91 98794 11327 | +91 2822 221121

Ishan Ceramic Zone, C-wing, 8-A, N.H., At.Lalpar, MORBI-363642, INDIA.

000

= = ! !!!! !!

1111

exportceramex@gmail.com | info@ceramexoverseas.com

www.ceramexceramic.com

 \boxtimes

